The new degree of comfort.™

Professional *Classic*™ Atmospheric gas water heaters are engineered for more hot water at a low operating cost

Efficiency

- .58 - .61 EF
- More hot water at a low operating cost

Performance

- FHR: 49 to 88 gallons for natural gas
- Recovery: 25.5 to 38.2 gallons at a 90 degree rise, based on model

Guardian System™ & Sensor

- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean

Combustion Shut-off System



Flame Arrestor Plate

Maintenance Free

Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

Longer Life

- Rheem exclusive R-Tech (resistored) anode rod provides long-lasting tank protection

High Altitude Compliant

- All models certified up to 6,000 ft. above sea level

Plus…

- Easy to light – no matches required
- EverKleen™ patented system fights sediment build-up
- Enhanced flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant
- Standard replacement parts

Warranty

- 6-Year limited tank and parts warranty*

*See Residential Warranty Certificate for complete information

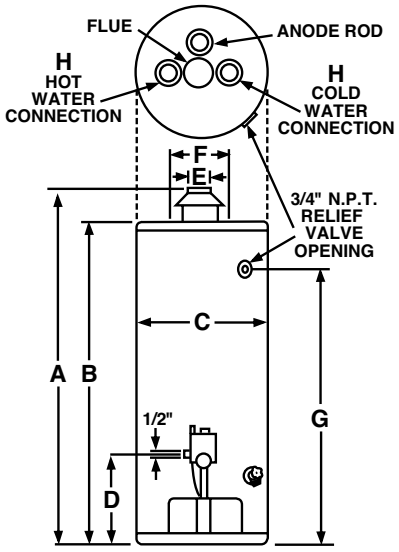

Professional *Classic* Atmospheric

30, 40 and 50-Gallon Capacities
Up to 40,000 Btu/h
Natural and LP Gas

† LEED Point = 1

DESCRIPTION			FEATURES			ROUGHING IN DIMENSIONS (SHOWN IN INCHES)									ENERGY INFO.
TYPE	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H NAT.	RECOVERY IN G.P.H. 90° RISE NAT.	FIRST HOUR DEL. G.P.H. NAT.	HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CNTR. F	HT. TO SIDE T&P VALVE G	WATER CONN. SIZE H	SHIP. WT. (LBS)	ENERGY FACTOR NAT.
Short	30	PROG30S-30N CN61	30	25.5	49	49-3/4	46-1/4	19-3/4	14-1/2	3	8	40-1/4	3/4	98	0.61
Short	50	PROG50S-40N CN61†	40	38.2	86	55-1/3	51-3/8	23-3/4	14-1/2	3 or 4	8	44-3/4	3/4	160	0.61
Short	40	PROG40S-36N CN59	36	30.5	72	53-1/8	49-3/8	20-1/4	14-1/2	3-4*	8	42-3/4	3/4	130	0.59
Short	50	PROG50S-40N CN58	40	38.2	88	54-3/8	52-1/2	22-1/4	14-1/2	4	8	44	3/4	160	0.58

Specify LP gas when ordering. Add "P" suffix to the model number. Example PROG30S-30P CN61
† Complies with BC construction requirements.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com

PRINTED IN U.S.A. 01/14 WP FORM NO. PROG RHCAN